



HP Gloss Poster Paper, 3-in Core for HP PageWide Technology

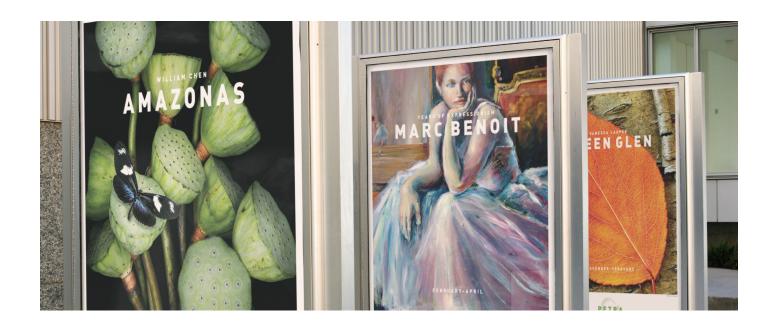

The HP large format printing system—the complete solution

HP PageWide XL printers, Original HP PageWide XL pigment inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.



¹ In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging.

Produce attention-getting gloss prints

Deliver excellent image quality

HP Gloss Poster Paper, 3-in Core for HP PageWide Technology provides vibrant color and excellent image quality. Produce point-of-sale (POS) posters at breakthrough speeds.

Expand your applications

Offer a wide array of graphic applications including POS posters and GIS maps.

Maintain a smooth workflow and high productivity

Move smoothly and rapidly through post-print processing with this fast-dry poster paper. Experience reliable and trouble-free performance.

Target customers	Applications	Benefits	
Print service providers	POS posters	High-production printing	
Retail store in-house printing	Presentations	Vibrant poster image quality	
	GIS maps	Fast dry time for easy handling	
		Recyclable through commonly available programs ¹	

Optimized for HP PageWide XL printers

Technical specifications



HP Gloss Poster Paper, 3-in Core for HP PageWide Technology For the latest ICC profiles/paper presets, please visit <u>HPLFMedia.com/paperpresets</u>.

Ink technology Original HP PageWide XL pigment inks Thickness 185 microns/7.3 mil per ISO 534 Test Method Opacity 96% per TAPPI T-425 Test Method Brightness 92% per TAPPI T-425 Test Method Whiteness 120 per ISO 11476 Test Method Finish Gloss Operating temperature 10 to 30° C / 50 to 86° F Operating humidity 30 to 65% RH Dry time Immediate (at 23°C, 50% RH) Shelf life 1 year, unopened in original packaging Storage temperature 10 to 30° C / 50 to 86° F Storage humidity 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging Country of origin Product of Germany Product of Germany Drdering information Product numbers Roll sizes UPC codes Region Worldwide									
Thickness 185 microns/7.3 mil per ISO 534 Test Method Opacity 96% per TAPPI T-425 Test Method Brightness 92% per TAPPI T-425 om-87 Test Method Whiteness 120 per ISO 11476 Test Method Finish Gloss Operating temperature 10 to 30° C / 50 to 86° F Operating temperature 10 to 30° C / 50 to 86° F Operating temperature 10 to 30° C / 50 to 86° F Operating temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage humidity 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept liquid packaging Country of origin Product numbers Roll sizes UPC codes Region LSQ08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warran statement please see <u>HPLFMedi</u>	Weight	190 g/m² per ISO 53	190 g/m² per ISO 536 Test Method						
Opacity 96% per TAPPI T-425 Test Method Brightness 92% per TAPPI T-425 Test Method Whiteness 120 per ISO 11476 Test Method Finish Gloss Operating temperature 10 to 30° C / 50 to 86° F Operating humidity 30 to 65% RH Dry time Immediate (at 23°C, 50% RH) Shelf life 1 year, unopened in original packaging Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage humidity 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging Country of origin Product of Germany Ordering information Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 8484120161	Ink technology	Original HP PageWic	Original HP PageWide XL pigment inks						
Brightness 92% per TAPPI T-452 om-87 Test Method Whiteness 120 per ISO 11476 Test Method Finish Gloss Operating temperature 10 to 30° C / 50 to 86° F Operating humidity 30 to 65% RH Dry time Immediate (at 23°C, 50% RH) Shelf life 1 year, unopened in original packaging Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging Country of origin Product numbers Roll sizes UPC codes Region LSQ08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warran statement please see HPLEMedia.com/hp/MediaWarranties. To obtain warranty service, please	Thickness	185 microns/7.3 mil	185 microns/7.3 mil per ISO 534 Test Method						
Whiteness 120 per ISO 11476 Test Method Finish Gloss Operating temperature 10 to 30° C / 50 to 86° F Operating humidity 30 to 65% RH Dry time Immediate (at 23°C, 50% RH) Shelf life 1 year, unopened in original packaging Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 50% RH Recyclability 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that cacept liquid packaging Country of origin Product numbers Roll sizes UPC codes Region USQ08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warrant statement please see HPLFMedia.com/hp/MediaWarranties. To obtain warranty service, please	Opacity	96% per TAPPI T-42	96% per TAPPI T-425 Test Method						
Finish Gloss Operating temperature 10 to 30° C / 50 to 86° F Operating humidity 30 to 65% RH Dry time Immediate (at 23°C, 50% RH) Shelf life 1 year, unopened in original packaging Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collectio systems that accept liquid packaging Country of origin Product of Germany Ordering information Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warran statement please see HPLEMedia.com/hp/MediaWarranties. To obtain warranty service, please	Brightness	92% per TAPPI T-457	92% per TAPPI T-452 om-87 Test Method						
Operating temperature 10 to 30° C / 50 to 86° F Operating humidity 30 to 65% RH Dry time Immediate (at 23°C, 50% RH) Shelf life 1 year, unopened in original packaging Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage temperature 10 to 30° C / 50 to 86° F Storage humidity 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collectio systems that accept liquid packaging Country of origin Product of Germany Ordering information Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warran statement please see HPLEMedia.com/hp/MediaWarranties. To obtain warranty service, please	Whiteness	120 per ISO 11476 Te	120 per ISO 11476 Test Method						
Operating humidity 30 to 65% RH Dry time Immediate (at 23°C, 50% RH) Shelf life 1 year, unopened in original packaging Storage temperature 10 to 30° C / 50 to 86° F Storage humidity 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging Country of origin Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warran statement please see HPLEMedia.com/hp/MediaWarranties. To obtain warranty service, please	Finish	Gloss	Gloss						
Dry time Immediate (at 23°C, 50% RH) Shelf life 1 year, unopened in original packaging Storage temperature 10 to 30° C / 50 to 86° F Storage humidity 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging Country of origin Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warran statement please see HPLEMedia.com/hp/MediaWarranties. To obtain warranty service, please	Operating temperature	10 to 30° C / 50 to 86	10 to 30° C / 50 to 86° F						
Shelf life 1 year, unopened in original packaging Storage temperature 10 to 30° C / 50 to 86° F Storage humidity 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging Country of origin Product of Germany Ordering information Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warran statement please see HPLEMedia.com/hp/MediaWarranties. To obtain warranty service, please	Operating humidity	30 to 65% RH	30 to 65% RH						
Storage temperature 10 to 30° C / 50 to 86° F Storage humidity 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collectio systems that accept liquid packaging Country of origin Product of Germany Ordering information Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Warranty HP large format printing materials are free from defects in materials and workmanship. For warrant statement please see HPLEMedia.com/hp/MediaWarranties. To obtain warranty service, please	Dry time	Immediate (at 23°C,	Immediate (at 23°C, 50% RH)						
Storage humidity 30 to 65% RH Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collectio systems that accept liquid packaging Country of origin Product of Germany Ordering information Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warrant statement please see HPLEMedia.com/hp/MediaWarranties. To obtain warranty service, please	Shelf life	1 year, unopened in	1 year, unopened in original packaging						
Recyclability In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collectio systems that accept liquid packaging Country of origin Product of Germany Ordering information Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warrant statement please see HPLFMedia.com/hp/MediaWarranties. To obtain warranty service, please	Storage temperature	10 to 30° C / 50 to 86	10 to 30° C / 50 to 86° F						
accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging Country of origin Product of Germany Ordering information Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warrant statement please see HPLFMedia.com/hp/MediaWarranties. To obtain warranty service, please	Storage humidity	30 to 65% RH	30 to 65% RH						
Ordering information Product numbers Roll sizes UPC codes Region L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warrant statement please see HPLFMedia.com/hp/MediaWarranties. To obtain warranty service, please	Recyclability	accept mixed paper	accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection						
L5Q08A 1016 mm x 61 m (40 in x 200 ft) 848412016192 Worldwide Warranty HP large format printing materials are free from defects in materials and workmanship. For warran statement please see HPLFMedia.com/hp/MediaWarranties. To obtain warranty service, please	Country of origin	Product of Germany	Product of Germany						
Warranty HP large format printing materials are free from defects in materials and workmanship. For warran statement please see <u>HPLFMedia.com/hp/MediaWarranties</u> . To obtain warranty service, please	Ordering information	Product numbers	Roll sizes	UPC codes	Region				
statement please see <u>HPLFMedia.com/hp/MediaWarranties</u> . To obtain warranty service, please		L5Q08A	1016 mm x 61 m (40 in x 200 ft)	848412016192	Worldwide				
	Warranty	statement please see HPLFMedia.com/hp/MediaWarranties. To obtain war							



For detailed information on the HP large format printing materials portfolio and to order, visit HPLFMedia.com

© 2015 Hewlett-Packard Development Company. © 2015 Brand Management Group. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP and BMG shall not be liable for technical or editorial errors or omissions contained herein.

HP is a registered trademark of Hewlett-Packard Company and is used by Brand Management Group on license from Hewlett-Packard Company.

